

# Product Portfolio


TT&C

DATA DOWNLINK

NAVIGATION

LAUNCHER

PAYLOAD

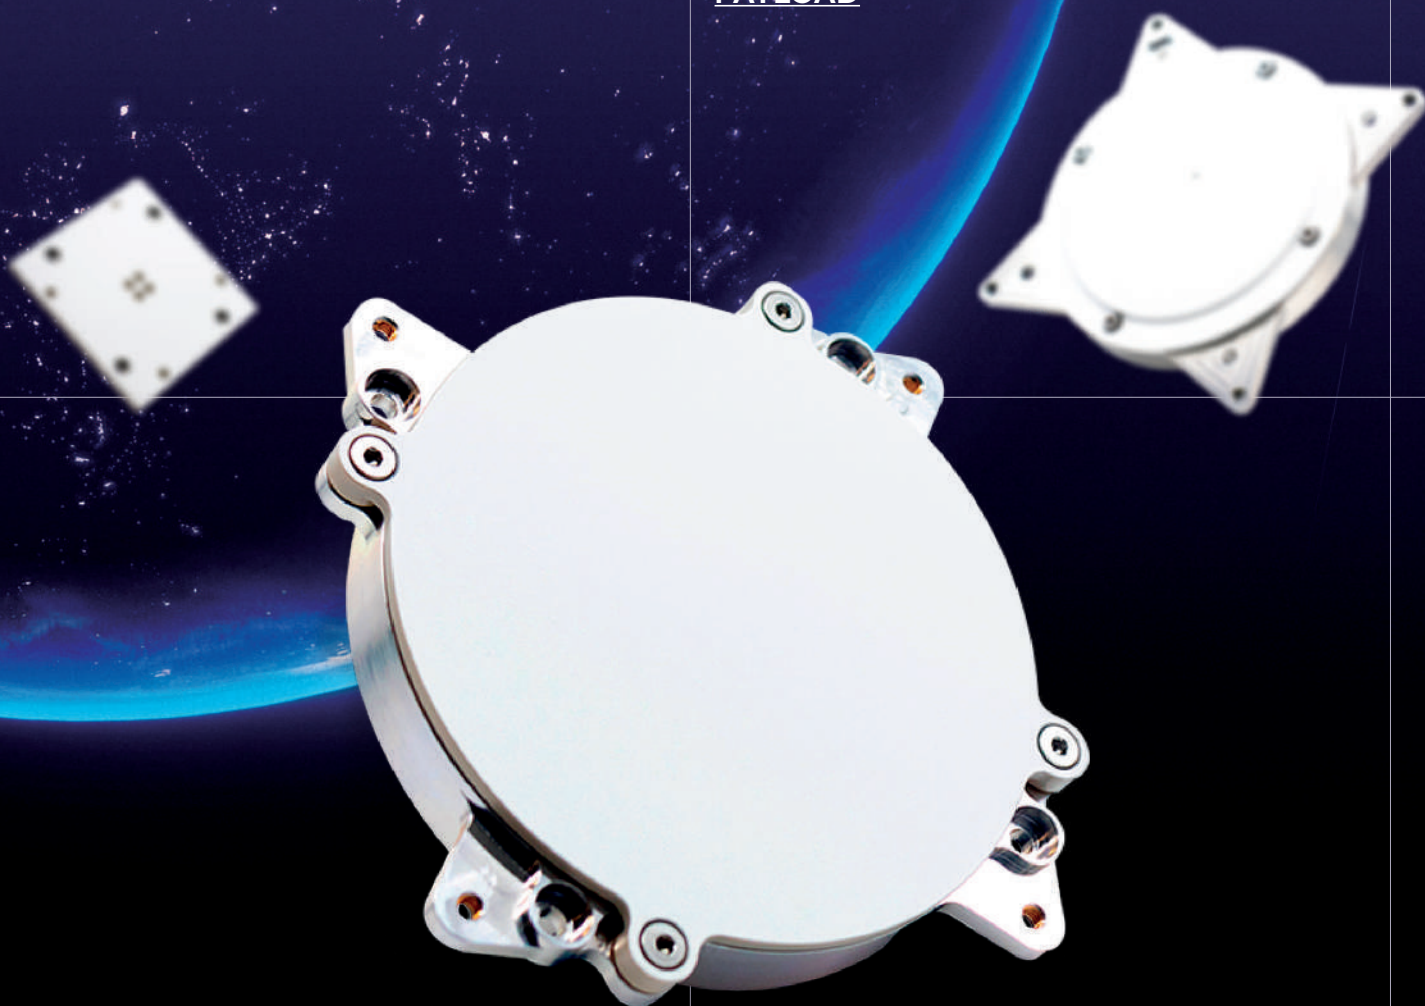

01  
Designed by  
experts

02  
Best in class  
performance

03  
Lean manufacturing  
process

04  
Made in France,  
delivered worldwide

[anywaves.com](https://anywaves.com) +

# ANYWAVES

SPACE ANTENNA MAKERS

# Anywaves

## Space Antenna Makers

At Anywaves, we design and manufacture high-performance space antennas to power the success of your missions — from satellites to launchers, rovers, and planetary landers.

Based in Toulouse, Europe's space capital, we bring together advanced Radio Frequency and Mechanical-Thermal expertise to deliver compact, reliable, and efficient antennas adapted to your operational environment.

Our products are built on strong flight heritage and a rigorous qualification process, ensuring performance and resilience throughout the entire mission lifetime.

From Earth observation and navigation to spectrum monitoring, telecommunications, and deep-space exploration, our antennas are tailored to support the most demanding space applications worldwide.



EN 9100 Certified



Short Lead Time



ITAR Free



High Volume Capability

**ANYWAVES**

SPACE ANTENNA MAKERS

# Why Anywaves



## Designed by experts

Our R&D team develops and designs antennas with state-of-the-art concepts, utilizing cutting-edge components and technologies. From PCBs to 3D printed materials, our expertise and flight heritage experience ensure the creation of reliable antennas tailored to your needs.



## Best in class performance

Anywaves antennas are optimized to deliver top-notch performance in space missions. Through rigorous testing and qualification processes, we ensure their resilience to harsh space conditions, including radiation, extreme temperatures, and vibrations.



## Lean manufacturing process

We have implemented a lean manufacturing process and a continuous improvement method called FMEA. This approach emphasizes continuous improvement, waste reduction, and standardized processes. It allows us to deliver high-quality products with fast lead times and optimal production volumes.



## Made in France, delivered worldwide

Anywaves antennas are proudly manufactured in France and delivered worldwide. Our products meet the highest quality standards with EN 9100 certification. All of our antennas are also ITAR-FREE so we can easily export them globally with more flexibility.

# Let's fly with our antennas



## TT&C



## DATA DOWNLINK



## NAVIGATION



## PAYLOAD



Anywaves develops a new generation of compact, high-performance antennas to meet the needs of the most demanding space missions. Our portfolio covers the full range of key applications for satellites and space vehicles — from TT&C for robust telemetry, tracking and command links, to Data Downlink for secure and efficient payload transmission, Navigation for precise and reliable GNSS reception, and advanced Payload solutions for telecommunications, inter-satellite links and mission-specific requirements. With a steadfast commitment to performance, reliability and adaptability, our antennas are engineered to meet the operational requirements of your mission—wherever space takes you.

GET THE BEST QUOTE  
FOR YOUR MISSIONS 



01

## TT&amp;C ANTENNAS

+

**S-Band**  
TT&C Antenna

P06

**Compact S-Band**  
TT&C Antenna

P08

**Ka-Band**  
TT&C Antenna

P10

**Test Hat**  
for S-band TT&C Antennas

P13

02

## DATA DOWNLINK ANTENNAS

+

**Wide Beam X-Band**  
Antenna

P16

**Compact X-Band**  
Antenna

P18

**Compact Dual-Polarized X-Band**  
Antenna

P20

**High-Gain X-Band**  
Antenna

P22

**Test Hat**  
for X-Band Antennas

P24

03

## NAVIGATION ANTENNAS

+

**GNSS L1/E1 Bands**  
Antenna

P27

**GNSS All-Bands**  
Antenna

P29

**GNSS All-Bands**  
Antenna with Integrated LNA

P31

**Test Hat**  
for GNSS All-Bands Antennas

P32

04

## LAUNCHER ANTENNAS

P35

05

## PAYLOAD ANTENNAS


P37





01

# TT&C Antennas




---

Anywaves S-Band TT&C Antennas are used in the subsystem that provides the telemetry, tracking and command links between the satellite and the ground station.



## TT&C ANTENNAS

# S-Band TT&C Antenna

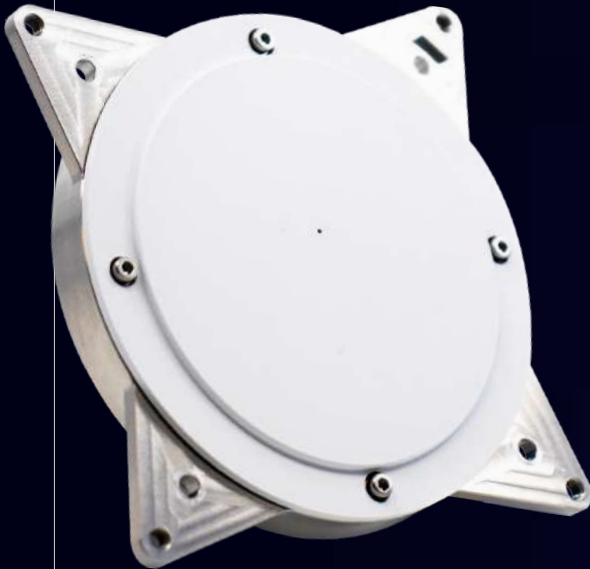

... cnesadvance ...

Anywaves S-Band antenna is our flagship antenna with a strong flight heritage (TRL 9). Perfectly suited to LEO platforms, this antenna operates both in transmission for telemetry and in reception for telecommand.

Its wide beam coverage enables the best satellite availability for TT&C link. In pair work, Anywaves S-band TT&C antenna provides an omni-directional coverage to enhance the satellite availability. This antenna is provided with right or left-hand circular polarization with a SMA (SubMiniature version A) connector.

**NB : compatible with Anywaves Test Hat for S-Band TT&C Antennas.**

Tx and Rx

Hemispherical Coverage

HPBW > 90°

Size < 1U

## Benefits

- ✓ Full Duplex Telemetry & Telecommand
- ✓ ITAR Free
- ✓ Acceptance Tests (RF, Mechanical, Thermal) included:
  - Return loss
  - Z-axis random vibration
  - Thermal cycling
- ✓ Radome protection against harsh environment: temperature & ESD
- ✓ In orbit since 2019
- CNESAdvance Label





# Typical Measured Performance

Tx and Rx

Hemispherical Coverage

HPBW &gt; 90°

Size &lt; 1U

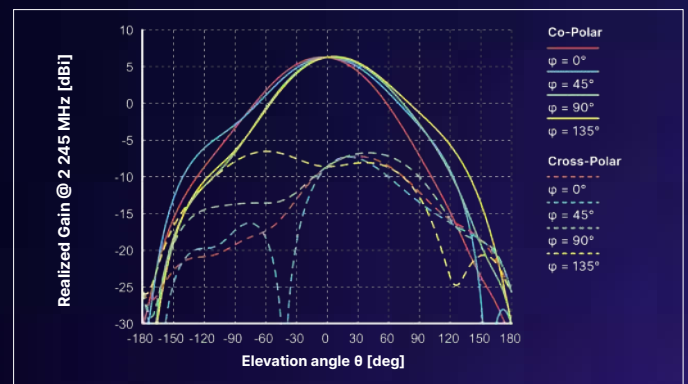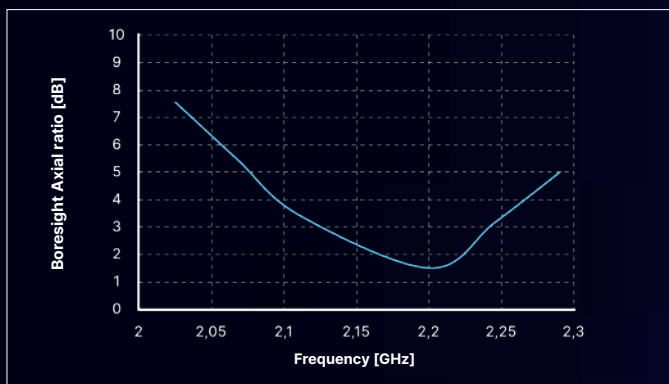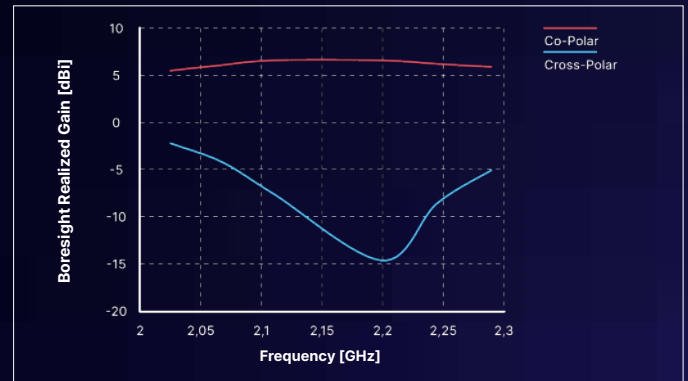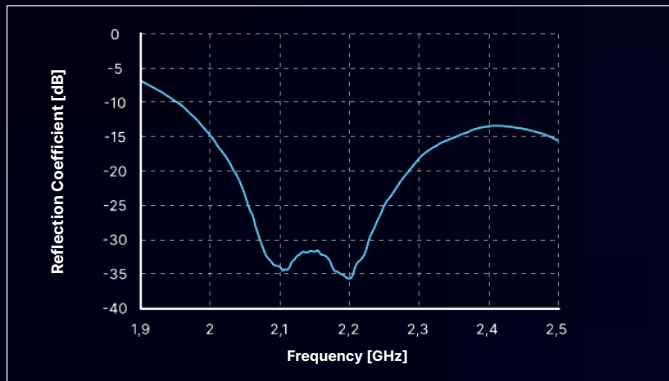

## ✓ Typical Performance

|                         |                                                                                                                               |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| Frequency Bands         | From 2.025 GHz to 2.29 GHz                                                                                                    |
| Bandwidth               | > 265 MHz                                                                                                                     |
| Polarization            | Left or Right Hand Circular Polarization                                                                                      |
| Reflection Coefficient  | < -15 dB (all frequency band)                                                                                                 |
| Half Power Beam Width   | > 90° ( $\pm 45^\circ$ in all planes)                                                                                         |
| Power Handling          | Transmit and Receive                                                                                                          |
| Efficiency              | > 92%                                                                                                                         |
| Gain @ 2.150 MHz        | Gain @ boresight > 6.5 dBi<br>Gain @ $\pm 30^\circ$ > 4.5 dBi<br>Gain @ $\pm 60^\circ$ > 0 dBi                                |
| Axial Ratio @ 2.150 MHz | < 3 dB from $0^\circ$ to $\pm 30^\circ$<br>< 5 dB from $0^\circ$ to $\pm 60^\circ$<br>< 8 dB from $0^\circ$ to $\pm 90^\circ$ |

## ✓ Physical Characteristics

|                                        |                                                                                                                                                         |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Envelope Size Without Connector        | L 84.3 x W 84.3 x H 12.1 mm <sup>3</sup><br>Protruding height: 6.3 mm                                                                                   |
| Mass With Connector                    | 136 $\pm$ 3g                                                                                                                                            |
| Connector                              | Coaxial SMA female (50 $\Omega$ )                                                                                                                       |
| Mechanical Interface                   | 4 x M3 (unthreaded hole)                                                                                                                                |
| Qualification Temperature              | -120°C / +120°C                                                                                                                                         |
| Protective Radome                      | VESPEL coated with SG121FD white paint (on Flight Models only) resistant to thermal and radiation environments and preventing electrostatic discharges. |
| Acceptance Tests on Flight Models      | - Radio Frequency<br>- Mechanical<br>- Thermal                                                                                                          |
| Acceptance Tests on Engineering Models | Radio Frequency Only                                                                                                                                    |



## TT&C ANTENNAS

# Compact S-Band TT&C Antenna

Anywaves Compact S-band TT&C antenna is an ultra compact antenna featuring excellent radiation characteristics over a wide frequency band, especially at high elevation angles. It can withstand harsh thermal environment thanks to a protective radome. Furthermore, both polarization (Right Handed and Left Handed Circular Polarization) can be used simultaneously.

**NB : compatible with Anywaves Test Hat for S-Band TT&C Antennas.**

Single or Dual-Polarization

Tx and Rx

Hemispherical Coverage

Wideband

Size < 1U

## Benefits

- ✓ Full Duplex Telemetry & Telecommand
- ✓ Wide frequency band
- ✓ Acceptance Tests (RF, Mechanical, Thermal) included:
  - Return loss
  - Z-axis random vibration
  - Thermal cycling
- ✓ Dual-Polarization capable
- ✓ ITAR Free



# Typical Measured Performance





Single or Dual-Polarization

Tx and Rx

Hemispherical Coverage

Wideband

Size &lt; 1U

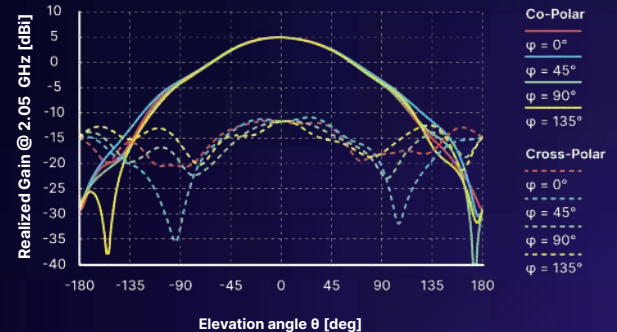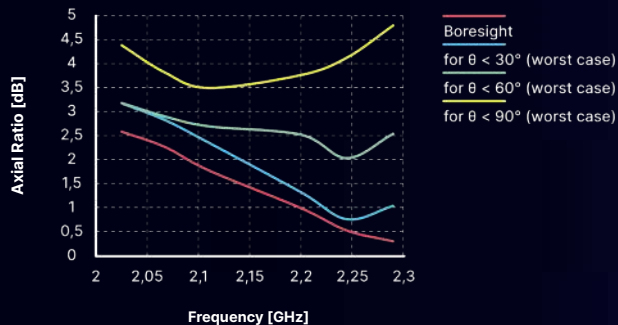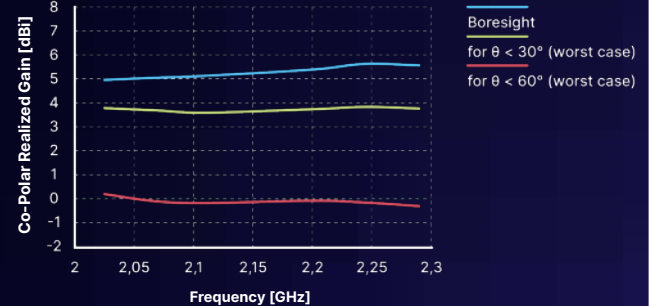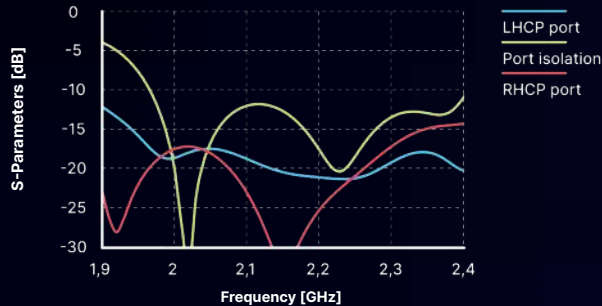

## ✓ Typical performance

|                        |                                                                                                                                 |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Frequency Bands        | From 1.98 GHz to 2.29 GHz                                                                                                       |
| Bandwidth              | > 310 MHz                                                                                                                       |
| Polarization           | Left and/or Right Hand Circular Polarization                                                                                    |
| Reflection Coefficient | RHCP port < -16 dB<br>LHCP port < -16 dB<br>Isolation < -12 dB                                                                  |
| Power Handling         | 20 W<br>Transmit and Receive                                                                                                    |
| Half Power Beam Width  | > 88° ( $\pm 44^\circ$ in all planes)                                                                                           |
| Realized Gain          | Gain @ boresight > 5.4 dBi<br>Gain @ $\pm 30^\circ$ > 4.2 dBi<br>Gain @ $\pm 60^\circ$ > 0.5 dBi                                |
| Axial Ratio            | < 3 dB from $0^\circ$ to $\pm 30^\circ$<br>< 3.5 dB from $0^\circ$ to $\pm 60^\circ$<br>< 4 dB from $0^\circ$ to $\pm 90^\circ$ |

## ✓ Physical characteristics

|                                        |                                                                                                                                                       |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Envelope Size                          | L 70.9 x W 70.9 x H 10.3 mm <sup>3</sup><br>Protruding Height: 3.62 mm<br>(connectors excluded)                                                       |
| Mass With Connector (RF load included) | SMA: < 106g                                                                                                                                           |
| Connector                              | 2 x SMA female (50Ω)                                                                                                                                  |
| Mechanical Interface                   | 4 x M3 (unthreaded hole)                                                                                                                              |
| Qualification Temperature              | -120°C / +120°C                                                                                                                                       |
| Protective Radome                      | PEEK coated with SG121FD white paint (on Flight Models only) resistant to thermal and radiation environments and preventing electrostatic discharges. |
| Acceptance Tests on Flight Models      | - Radio Frequency<br>- Mechanical<br>- Thermal                                                                                                        |
| Acceptance Tests on Engineering Models | Radio Frequency Only                                                                                                                                  |



## TT&C ANTENNA

# Ka-Band TT&C Antenna

The Ka-Band TT&C Antenna offers a compact and reliable solution for telemetry, tracking, and command operations in the Ka-band. Available in two models (Rx and Tx), it is designed for demanding space missions with scalable frequency to suit various operational needs. The choke ring design reduces multipath interference, ensuring accurate signal transmission and reception. Supporting single- or dual-circular polarization (RHCP/LHCP), it operates across the 19.7–20.2 GHz (Tx) and 29.5–30 GHz (Rx) bands with excellent axial ratio stability and low reflection coefficient. Lightweight, durable, and engineered for extreme environments, this antenna ensures optimal performance.

Rx or TX

Hemispherical Coverage

HPBW > 90°

Size < 1U

## Benefits

- ✓ High Performance on TT&C Ka Bands
- ✓ Ultra High Beamwidth
- ✓ Acceptance Tests (RF, Mechanical, Thermal) included:
  - Return loss
  - Z-axis random vibration
  - Thermal cycling
- ✓ Full Metal Design: Resistant against harsh environment
- ✓ ITAR Free





# Typical Measured Performance

Rx

Hemispherical Coverage

HPBW &gt; 90°

Size &lt; 1U

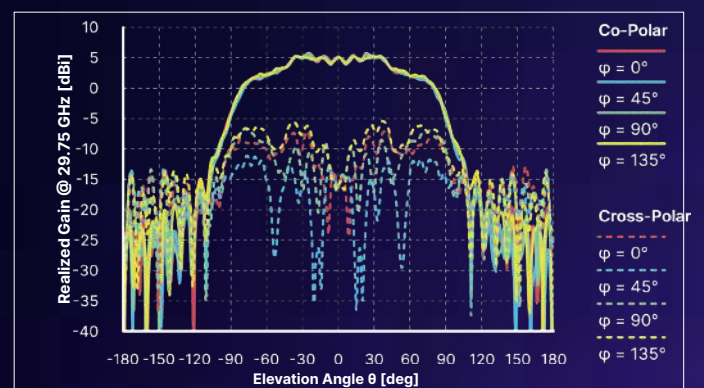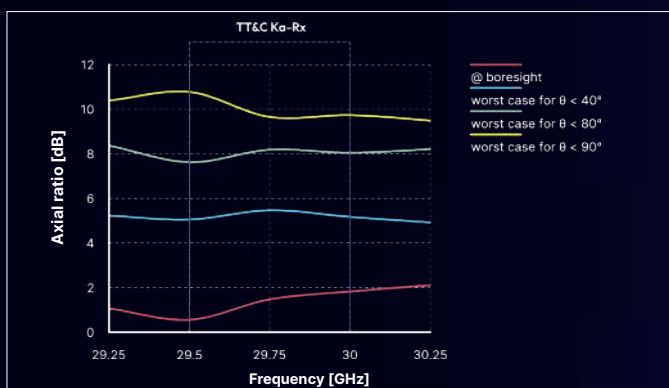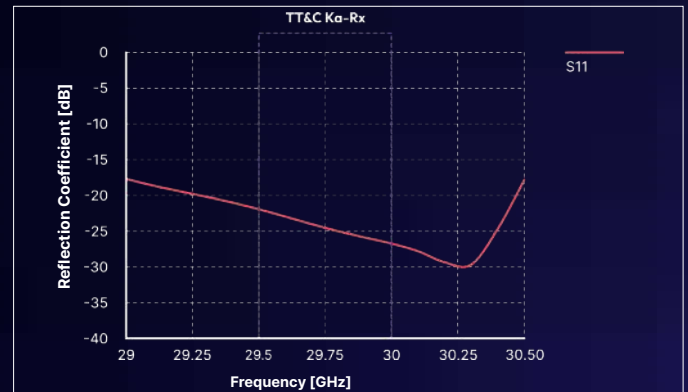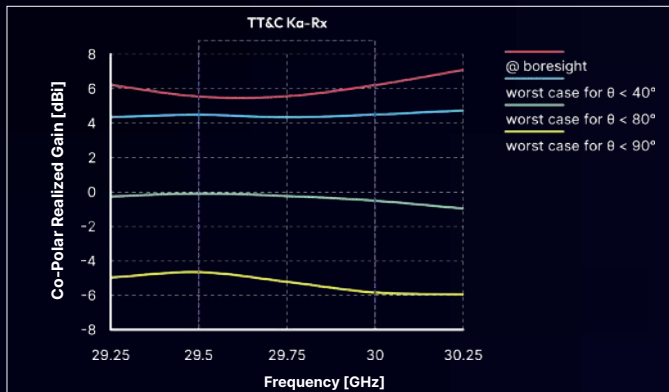

## Typical Measured Performances

|                        |                                                                                                                                    |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Frequency Band         | From 29.5 GHz to 30 GHz                                                                                                            |
| Polarization           | Left or Right Hand Circular Polarization                                                                                           |
| Reflection Coefficient | < -18 dB                                                                                                                           |
| Realized Gain          | > 5 dBi @boresight<br>> 4 dBi @ $\pm 40^\circ$<br>> -0.5 dBi @ $\pm 80^\circ$                                                      |
| Axial Ratio            | < 5.5 dB from $0^\circ$ to $\pm 40^\circ$<br>< 8.5 dB from $0^\circ$ to $\pm 80^\circ$<br>< 11 dB from $0^\circ$ to $\pm 90^\circ$ |

## Physical Characteristics

|                                        |                                                                                                                                                 |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Envelope Size                          | L 108 x W 108 x H 44 mm <sup>3</sup><br>Protruding Height: 15.2 mm                                                                              |
| Test-Cap compatibility                 | Yes                                                                                                                                             |
| Mass                                   | < 75 g                                                                                                                                          |
| Connector                              | SMA 2.9 female 50<br>(No floating potentials within the antenna structure. Coax core electrically connected with antenna full-metal structure.) |
| Mechanical Interface                   | 4 x M3 (unthreaded hole)                                                                                                                        |
| Qualification Temperature              | -120°C / +120°C                                                                                                                                 |
| Acceptance Tests on Flight Models      | - Radio Frequency<br>- Mechanical<br>- Thermal                                                                                                  |
| Acceptance Tests on Engineering Models | Radio Frequency Only                                                                                                                            |





# Typical Measured Performance

Tx

Hemispherical Coverage

HPBW &gt; 90°

Size &lt; 1U

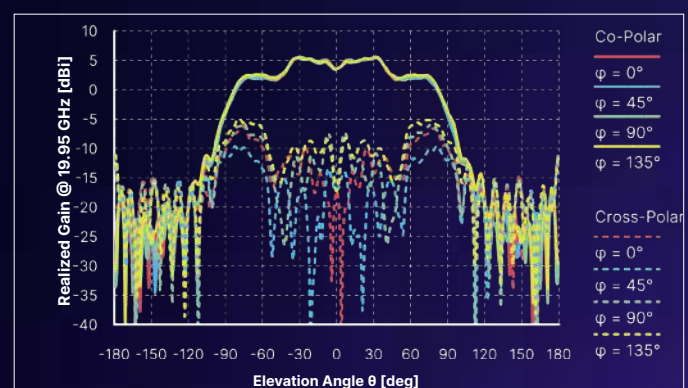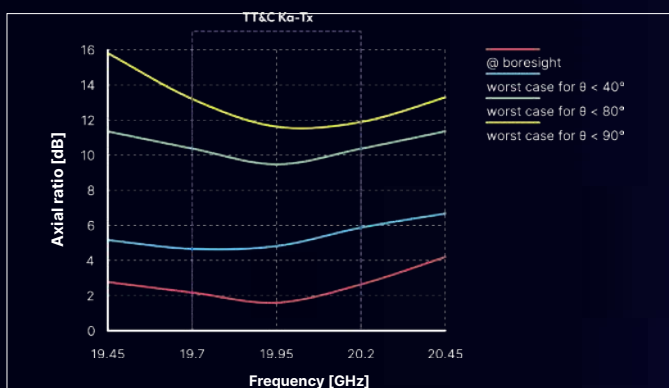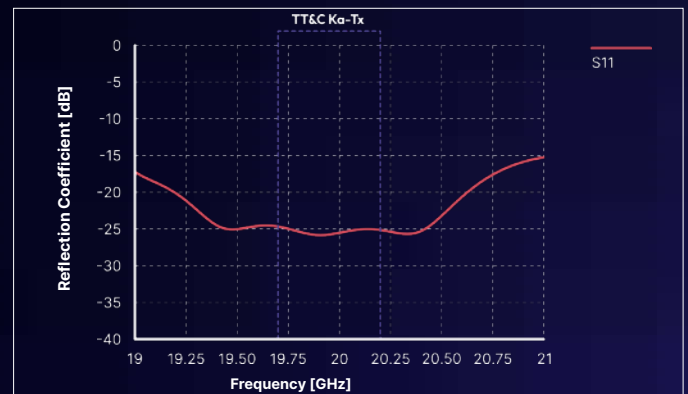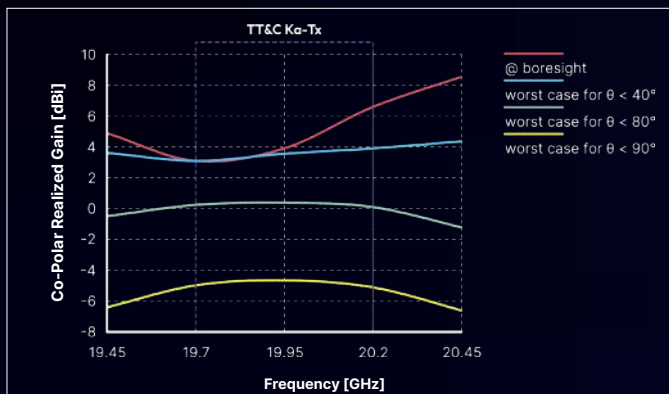

## Typical Measured Performances

|                        |                                                                                                                                     |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Frequency Band         | From 19.7 GHz to 20.2 GHz                                                                                                           |
| Polarization           | Left or Right Hand Circular Polarization                                                                                            |
| Reflection Coefficient | < -18dB                                                                                                                             |
| Realized Gain          | > 3 dBi @boresight<br>> 3 dBi @ $\pm 40^\circ$<br>> 0 dBi @ $\pm 80^\circ$                                                          |
| Axial Ratio            | < 6 dB from $0^\circ$ to $\pm 40^\circ$<br>< 10.5 dB from $0^\circ$ to $\pm 80^\circ$<br>< 13.5 dB from $0^\circ$ to $\pm 90^\circ$ |

## Physical Characteristics

|                                        |                                                                                                                                                 |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Envelope Size                          | L 50 x W 50 x H 60 mm <sup>3</sup><br>Protruding Height: 19.69 mm                                                                               |
| Test-Cap compatibility                 | Yes                                                                                                                                             |
| Mass                                   | <140 g                                                                                                                                          |
| Connector                              | SMA 2.9 female 50<br>(No floating potentials within the antenna structure. Coax core electrically connected with antenna full-metal structure.) |
| Mechanical Interface                   | 4 x M3 (unthreaded hole)                                                                                                                        |
| Qualification Temperature              | -120°C / +120°C                                                                                                                                 |
| Acceptance Tests on Flight Models      | - Radio Frequency<br>- Mechanical<br>- Thermal                                                                                                  |
| Acceptance Tests on Engineering Models | Radio Frequency Only                                                                                                                            |





## TT&C ANTENNAS

# Test Hat for S-Band TT&C Antennas

Anywaves Test Hat for S-Band TT&C Antennas is essential to carry out end to end testing (parallelism, assembly chain, thermal vacuum...). It features a simple and robust design consisting in a cylindrical aluminum cavity, covered with absorber material and terminated by a RF probe.

It operates over the frequency band of the S-Band TT&C antenna. It is delivered in a single part that can be directly screwed on top of the antenna, minimizing both the risk to damage the antenna and the manipulation steps.

**NB : a Test Hat compatible version of the Anywaves S-Band TT&C antenna is required.**

RF Chain Measurement

TVAC Compatibility

Plug & Play

On-platform Test

## Benefits

- ✓ Enables reproducible measurements of antenna & transceiver on the platform
- ✓ Very low impact on the antenna matching (reflection coefficient)
- ✓ No mounting bracket required on the platform (screwed on the antenna itself)
- ✓ ITAR Free
- ✓ Compatible with thermal vacuum environment with low outgassing properties
- ✓ Safe & easy to mount & dismount thanks to an oriented slot ensuring the correct positioning
- ✓ Low RF leakage to protect users from radiation during the test



# Typical Measured Performance

RF Chain Measurement

TVAC Compatibility

Plug & Play

On-platform Test

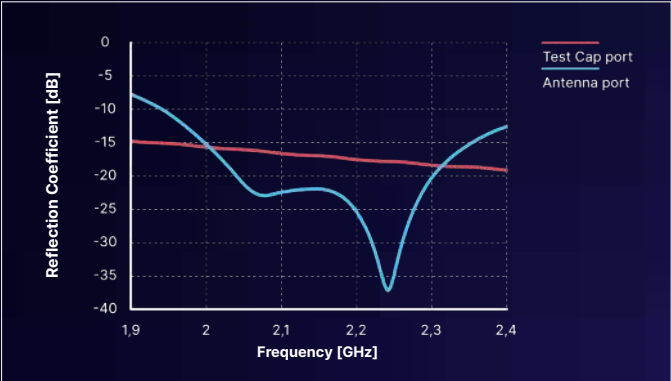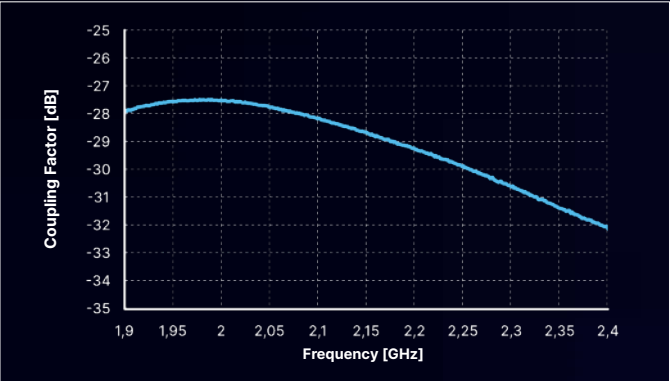

## Typical Performance

|                                         |                                                               |
|-----------------------------------------|---------------------------------------------------------------|
| Frequency Bands                         | From 1.98 GHz to 2.29 GHz                                     |
| Bandwidth                               | > 310 MHz                                                     |
| Polarization                            | Left or Right Hand Circular Polarization                      |
| Reflection Coefficient at Antenna Port  | < -15 dB                                                      |
| Reflection Coefficient at Test Hat Port | < -15 dB                                                      |
| Coupling Factor                         | ~ -29 dB                                                      |
| Coupling Factor Variation               | < 1 dB within telecommand band<br>< 2dB within telemetry band |

## Physical Characteristics

|                                 |                           |
|---------------------------------|---------------------------|
| Envelope Size Without Connector | Ø 117 mm x 98 mm          |
| Mass With Connector             | 910 ± 10 g                |
| Connector                       | Coaxial SMA female (50 Ω) |
| Mechanical Interface            | 4 x M3 (unthreaded hole)  |
| Qualification Temperature       | -40°C / +70°C             |

02


# Data Downlink

## Antennas

---



Anywaves X-Band Antennas are designed for data downlink and payload telemetry in space missions.

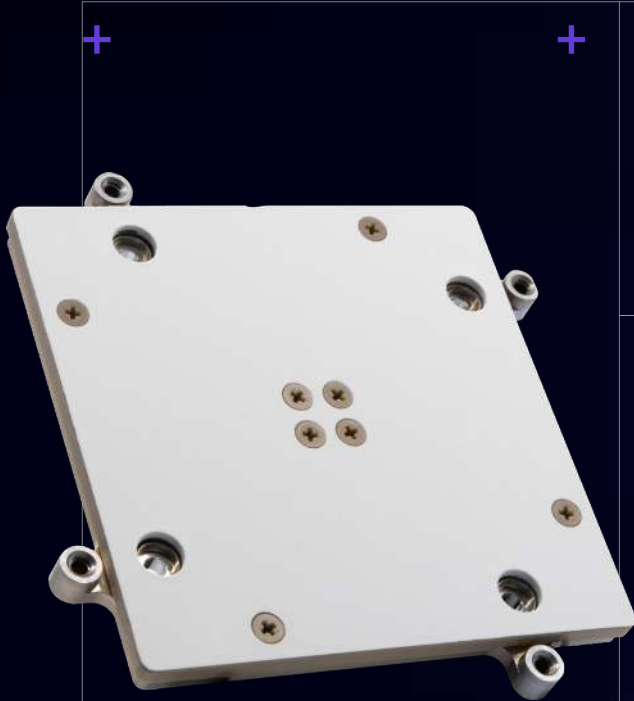

## DATA DOWNLINK ANTENNAS

# Wide Beam X-Band Antenna

Anywaves' Wide Beam X-Band antenna is a compact, ultra-thin solution for payload telemetry, offering reliable hemispherical coverage for robust mission data downlink.

Designed for LEO satellites with broad visibility needs, it fits easily into nanosat platforms thanks to its sub-1U form factor. Its circular polarization ensures stable performance across a wide angular range. A protective radome enhances resilience to harsh thermal and ESD conditions.

NB: Fully compatible with Anywaves' X-Band Test Hat.

Tx

HPBW > 85°

Ultra Low Profile

RHCP or LHCP

Size < 1U

## Benefits

- ✓ Wide coverage payload telemetry
- ✓ Radome protection against harsh environment: temperature & ESD
- ✓ Test cap compatible
- ✓ High cross-polarization discrimination
- ✓ ITAR Free
- ✓ Acceptance Tests (RF, Mechanical, Thermal) included:
  - Return loss
  - Z-axis random vibration
  - Thermal cycling



# Typical Measured Performance





Tx

HPBW &gt; 85°

Ultra Low Profile

RHCP or LHCP

Size &lt; 1U

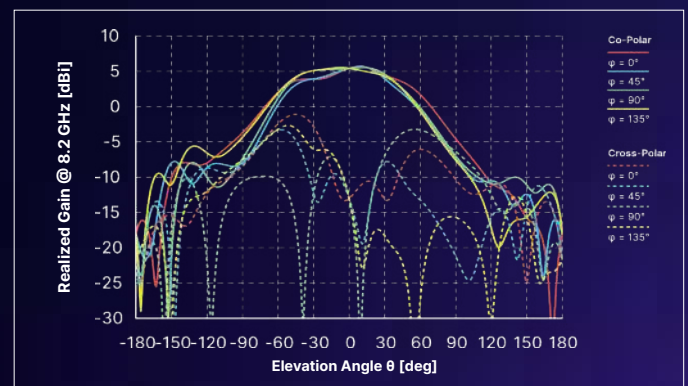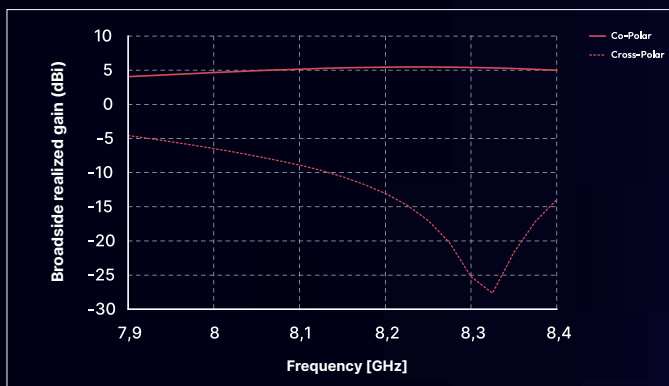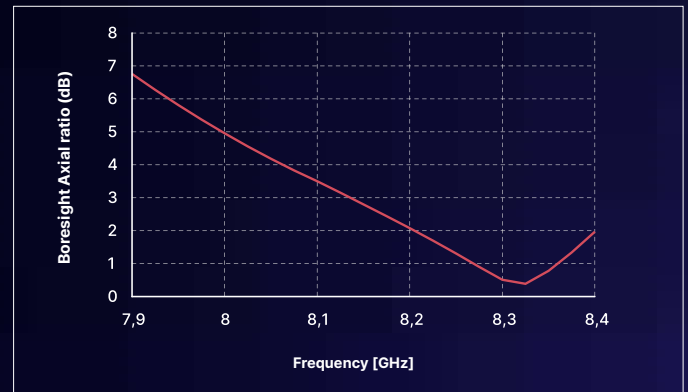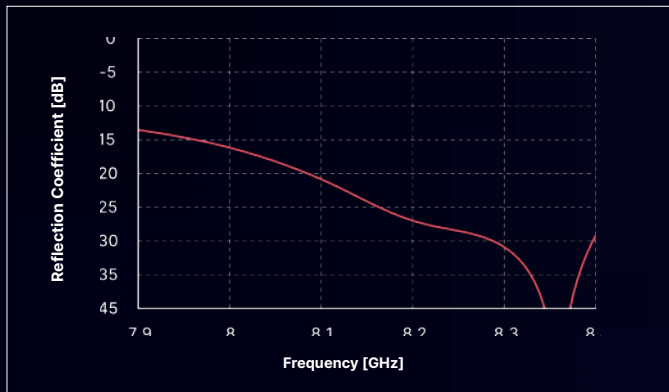


## Typical Measured Performances

|                        |                                                                                                   |
|------------------------|---------------------------------------------------------------------------------------------------|
| Frequency Band         | From 8.025 GHz to 8.4 GHz                                                                         |
| Polarization           | Right or Left Hand Circular Polarization                                                          |
| Reflection Coefficient | < -15 dB                                                                                          |
| Realized Gain @8.2 GHz | Gain @ boresight > 5.0 dBi<br>Gain @ $\pm 30^\circ$ > 4.0 dBi<br>Gain @ $\pm 60^\circ$ > -1.0 dBi |
| Bandwidth              | 375 MHz                                                                                           |
| Half Power Beam Width  | ~86° (-47°/+39° in all planes) @ 8.2 GHz                                                          |

## Physical Characteristics

|                                        |                                                                                                                            |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Envelope size without connectors       | L 100 x W 100 x H 6.5 mm3<br>Height with connector: 16 mm                                                                  |
| Mass With Connector                    | 70 g $\pm$ 7 g                                                                                                             |
| Connector                              | Coaxial SMA female (50 $\Omega$ )                                                                                          |
| Mechanical Interface                   | 4 x M3 (unthreaded hole)                                                                                                   |
| Qualification Temperature              | -120°C / +120°C                                                                                                            |
| Protective Radome                      | PEEK coated with SG121FD white paint (on Flight Models only) resistant to thermal and preventing electrostatic discharges. |
| Acceptance Tests on Flight Models      | - Radio Frequency<br>- Mechanical<br>- Thermal                                                                             |
| Acceptance Tests on Engineering Models | Radio Frequency Only                                                                                                       |

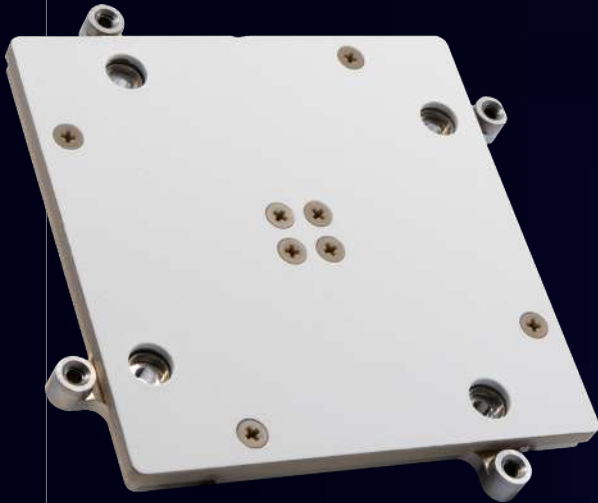

## DATA DOWNLINK ANTENNAS

# Compact X-Band Antenna

Anywaves' Compact X-Band Antenna is an ultra-low-profile antenna designed for payload telemetry from the satellite to the ground station.

This antenna features a broadside directive beam, with high-quality circular polarization, to enable higher data rates for the payload telemetry downlink. Due to its very compact design, it is perfectly suitable for nanosatellites and LEO platforms.

**NB : compatible with Anywaves Test Hat for High-Gain X-Bands Antennas.**

Tx

G > 15 dBi

Ultra Low Profile

RHCP or LHCP

Size < 1U

## Benefits

- ✓ High data-rate payload telemetry
- ✓ High cross-polarization discrimination
- ✓ Acceptance Tests (RF, Mechanical, Thermal) included:
  - Return loss
  - Z-axis random vibration
  - Thermal cycling
- ✓ Radome protection against harsh environment: temperature & ESD
- ✓ ITAR Free

# Typical Measured Performance





Tx

G &gt; 15 dBi

Ultra Low Profile

RHCP or LHCP

Size &lt; 1U

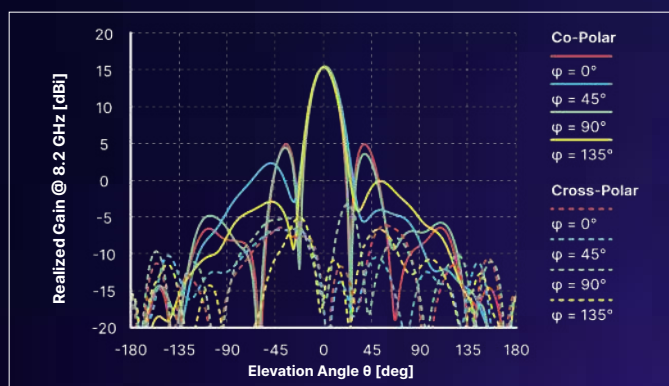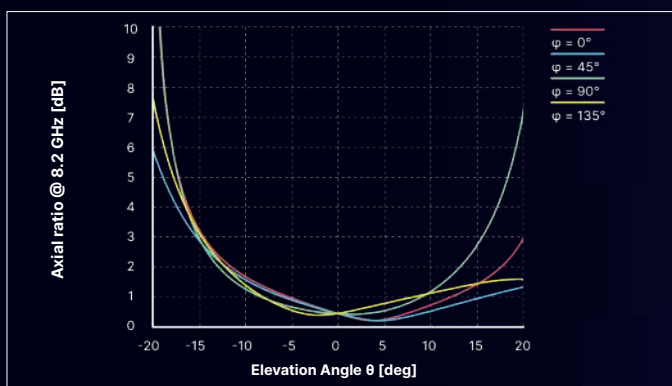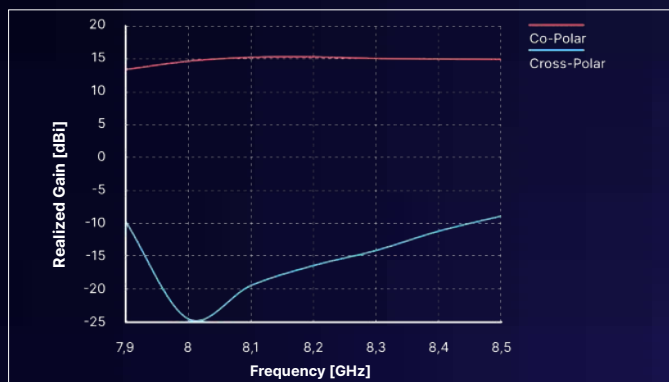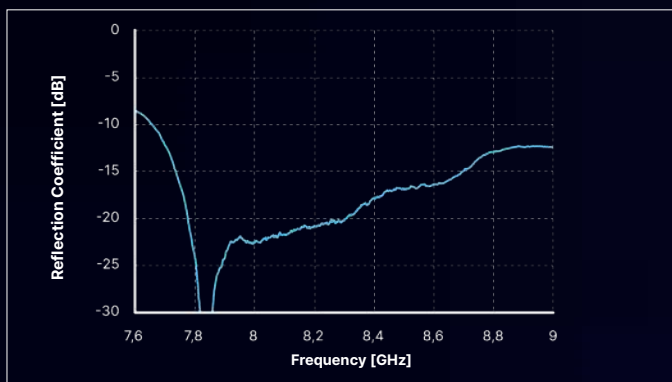

## ✓ Typical Performance

|                         |                                                                                               |
|-------------------------|-----------------------------------------------------------------------------------------------|
| Frequency Band          | From 7.9 GHz to 8.5 GHz                                                                       |
| Bandwidth               | 600 MHz                                                                                       |
| Polarization            | Left or Right Hand Circular Polarization                                                      |
| Reflection Coefficient  | < -15 dB                                                                                      |
| Half Power Beam Width   | ~ 20° ( $\pm 10^\circ$ )                                                                      |
| Radiation Efficiency    | > 70%                                                                                         |
| Power Handling          | 20 W                                                                                          |
| Realized Gain @ 8.2 GHz | 15.5 dBi                                                                                      |
| Axial Ratio @ 8.2 GHz   | < 1 dB from 0° to $\pm 5^\circ$ (all planes)<br>< 2 dB from 0° to $\pm 10^\circ$ (all planes) |

## ✓ Physical Characteristics

|                                        |                                                                                                                            |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Envelope Size                          | L 100 x W 100 x H 16 mm <sup>3</sup><br>Protruding Height: 6.5 mm<br>(connectors excluded)                                 |
| Mass With Connector                    | 70 g $\pm$ 7 g                                                                                                             |
| Connector                              | Coaxial SMA female (50Ω)                                                                                                   |
| Mechanical Interface                   | 4 x M3 (unthreaded hole)                                                                                                   |
| Qualification Temperature              | -120°C / +120°C                                                                                                            |
| Protective Radome                      | PEEK coated with SG121FD white paint (on Flight Models only) resistant to thermal and preventing electrostatic discharges. |
| Acceptance Tests on Flight Models      | - Radio Frequency<br>- Mechanical<br>- Thermal                                                                             |
| Acceptance Tests on Engineering Models | Radio Frequency Only                                                                                                       |



## DATA DOWNLINK ANTENNAS

# Compact Dual-Polarized X-Band Antenna

This compact 1U X-band antenna offers simultaneous dual circular polarization (LHCP & RHCP), enabling increased data rates or polarization diversity. It is ideal on small satellite platforms, particularly those requiring high-data-rate payload telemetry such as Earth Observation missions.

Despite its compact form factor, the antenna delivers a boresight gain exceeding 16.5 dBi, making it a robust choice for demanding applications where size, weight, and performance must be carefully balanced.

**NB: compatible with Anywaves Test Hat for High-Gain X-Bands Antennas.**

Dual-Polarization

Tx

G > 15.5 dBi

Ultra Low Profile

Size < 1U

## Benefits

- ✓ High data-rate payload telemetry
- ✓ Simultaneous dual circular polarization to double data throughput
- ✓ Rugged for harsh space environments
- ✓ High cross polar discrimination
- ✓ ITAR Free
- ✓ ESD Free
- ✓ Acceptance Tests (RF, Mechanical, Thermal) included:
  - Return loss
  - Z-axis random vibration
  - Thermal cycling

# Typical Measured Performance





Dual-Polarization

Tx

G &gt; 15.5 dBi

Ultra Low Profile

Size &lt; 1U

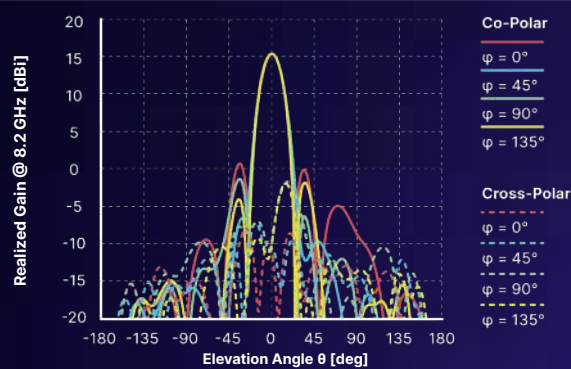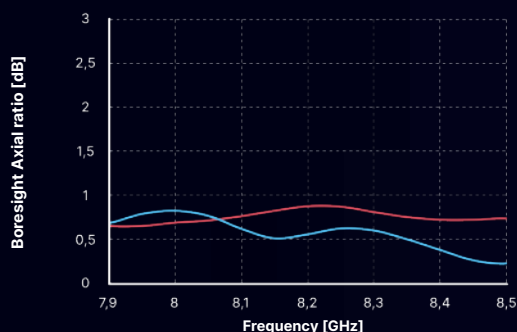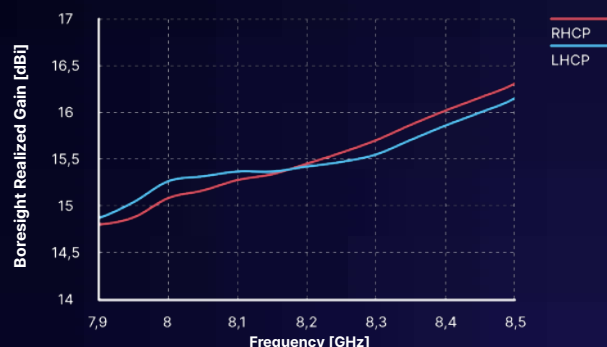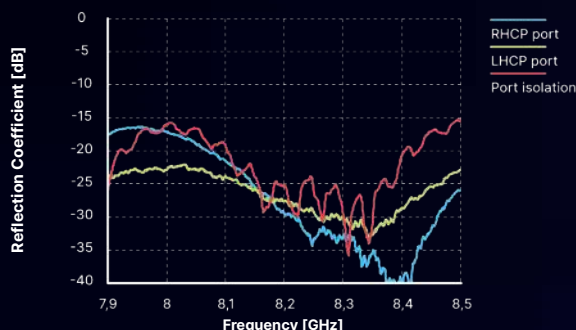

## ✓ Typical Performance

|                        |                                                                             |
|------------------------|-----------------------------------------------------------------------------|
| Frequency Bands        | 8.025 GHz to 8.4 GHz                                                        |
| Bandwidth              | 375 MHz                                                                     |
| Polarization           | Right and/or Left Hand Circular Polarization                                |
| Reflection Coefficient | RHCP port < -15 dB<br>LHCP port < -15 dB<br>Port to port isolation < -15 dB |
| Half Power Beam Width  | ~20° (±10°)                                                                 |
| Power Handling         | 20 W<br>(Either 1×20 W or 2×10 W Continuous Wave)                           |
| Realized Gain @8.2 GHz | > 15.5 dBi @boresight                                                       |
| Axial Ratio @8.2 GHz   | < 1 dB from 0° to ± 5° (all Planes)<br>< 2 dB from 0° to ± 10° (all Planes) |

## ✓ Physical Characteristics

|                                        |                                                                                                                                                         |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Envelope Size                          | L 100 x W 100 x H 26.1 mm <sup>3</sup><br>Protruding Height: 8.7mm<br>(connectors excluded)                                                             |
| Mass                                   | 140g ± 7g                                                                                                                                               |
| Qualification Temperature              | -120°C / +120°C                                                                                                                                         |
| Protective Radome                      | PEEK coated with SG121FD white paint<br>(on Flight Models only) resistant to thermal and radiation environments and preventing electrostatic discharges |
| Connectors                             | Coaxial SMA female (50Ω)                                                                                                                                |
| Mechanical Interface                   | 4 x M3 (unthreaded hole)                                                                                                                                |
| Acceptance Tests on Flight Models      | - Radio Frequency<br>- Mechanical<br>- Thermal                                                                                                          |
| Acceptance Tests on Engineering Models | Radio Frequency Only                                                                                                                                    |





## DATA DOWNLINK ANTENNAS

# High-Gain X-Band Antenna

Anywaves' High-Gain X-Band Antenna is optimized for payload telemetry requiring high data rates. With >20 dBi boresight gain over 7.9–8.5 GHz and circular polarization (RHCP or LHCP), it ensures excellent signal integrity.

Compact, lightweight, and reliable, it is built for harsh space environments with a PEEK-coated radome designed to withstand extreme temperatures. This antenna is ideal for demanding satellite missions needing robust and efficient data downlink.

NB: compatible with Anywaves Test Hat for High-Gain X-Bands Antennas.

Tx

High Gain

> 20 dBi

## Benefits




- ✓ High data-rate payload telemetry
- ✓ High gain broadside beam (>20dBi)
- ✓ Acceptance Tests (RF, Mechanical, Thermal) included:
  - Return loss
  - Z-axis random vibration
  - Thermal cycling
- ✓ Radome protection against harsh environment: temperature & ESD
- ✓ ITAR Free
- ✓ Test cap compatible

# Typical Measured Performance

Tx

High Gain

&gt; 20 dBi

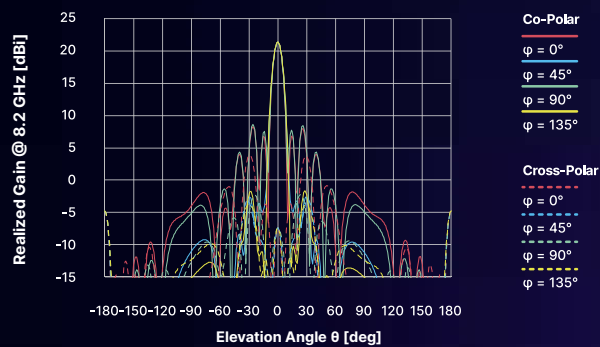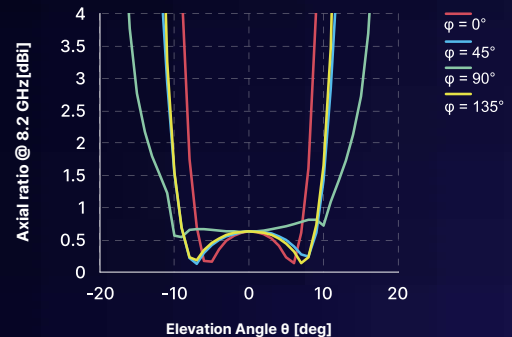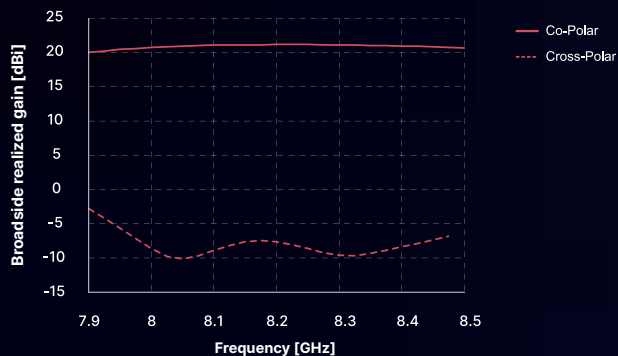

## Typical Measured Performances

|                        |                                                                                                                |
|------------------------|----------------------------------------------------------------------------------------------------------------|
| Frequency Band         | From 7.9 GHz to 8.5 GHz                                                                                        |
| Polarization           | Right or Left Hand Circular Polarization                                                                       |
| Reflection Coefficient | < -18 dB                                                                                                       |
| Realized Gain @8.2 MHz | >20 dBi @boresight                                                                                             |
| Axial Ratio @8.2 MHz   | < 1 dB from $0^\circ$ to $\pm 7.5^\circ$ ( all planes)<br>< 2 dB from $0^\circ$ to $\pm 8^\circ$ ( all planes) |
| Bandwidth              | 600 MHz                                                                                                        |
| Half Power Beam Width  | $\sim 9^\circ$ ( $\pm 4.5^\circ$ in all planes)                                                                |

## Physical Characteristics

|                                        |                                                                                                                                                          |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Envelope Size without connectors       | L 200 x W 200 x H 16 mm <sup>3</sup><br>Protruding Height: <8 mm                                                                                         |
| Connectors                             | Coaxial SMA female (50 $\Omega$ )                                                                                                                        |
| Test-Cap Compatibility                 | Yes                                                                                                                                                      |
| Mechanical interface                   | 4 x M3 (unthreaded hole)                                                                                                                                 |
| Qualification temperature              | $-120^\circ\text{C}$ / $+120^\circ\text{C}$                                                                                                              |
| Protective Radome                      | PEEK coated with SG121FD white paint (on Flight Models only) resistant to thermal and radiation environment and preventing from electrostatic discharges |
| Acceptance Tests on Flight Models      | - Radio Frequency<br>- Mechanical<br>- Thermal                                                                                                           |
| Acceptance Tests on Engineering Models | Radio Frequency Only                                                                                                                                     |



## DATA DOWNLINK ANTENNAS

# Test Hat for X-Band Antennas



Anywaves' Test Hat for X-Band Antennas is essential for satellite-level testing. Its single-part design ensures ease of use and minimal impact on the antenna. It allows reproducible measurements of the antenna and transceiver, enhancing end-to-end tests and saving time and money by avoiding complex anechoic chamber tests.

This Ground Segment Equipment, made from cylindrical aluminum with an RF probe, screws directly onto the antenna. It is compatible with thermal vacuum environments and ensures low RF leakage. The plug-and-play design offers reliable RF system measurements, demonstrating complete performance for better satellite reliability and increased customer satisfaction.

RF Chain Measurement

TVAC Compatibility

Plug & Play

On-platform Test

## Benefits

- ✓ Enables reproducible measurements of antenna & transceiver on the platform
- ✓ Very low impact on the antenna matching (reflection coefficient)
- ✓ No mounting bracket required on the platform (screwed on the antenna itself)
- ✓ ITAR Free
- ✓ Compatible with thermal vacuum environment with low outgassing properties
- ✓ Safe & easy to mount & dismount thanks to an oriented slot ensuring the correct positioning
- ✓ Low RF leakage to protect users from radiation during the test



# Typical Measured Performance

RF Chain Measurement

TVAC Compatibility

Plug & Play

On-platform Test

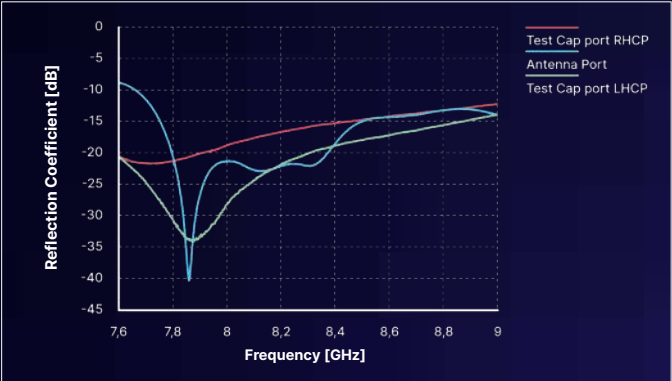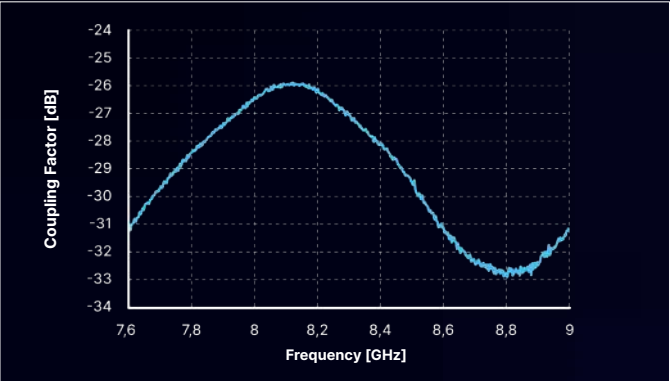

## Typical Performance

|                                         |                                              |
|-----------------------------------------|----------------------------------------------|
| Frequency Bands                         | From 8 GHz to 8.4 GHz                        |
| Bandwidth                               | 400 MHz                                      |
| Polarization                            | Right and/or Left Hand Circular Polarization |
| Reflection Coefficient at Antenna Port  | < -15 dB                                     |
| Reflection Coefficient at Test Hat Port | < -12 dB                                     |
| Coupling Factor                         | ~ -27 dB                                     |
| Coupling Factor Variation               | < 2.5 dB                                     |

## Physical Characteristics


|                                 |                                       |
|---------------------------------|---------------------------------------|
| Envelope Size Without Connector | 100.2 × 100.2 × 106.2 mm <sup>3</sup> |
| Mass With Connector             | 615 g ± 5 %                           |
| Connector                       | Coaxial SMA female (50 Ω)             |
| Mechanical Interface            | 4 x M3 captive screws (provided)      |
| Qualification Temperature       | -40°C / +85°C                         |



03


# Navigation Antennas

---



Anywaves GNSS Antennas are essential for accurate positioning and timing in space missions.



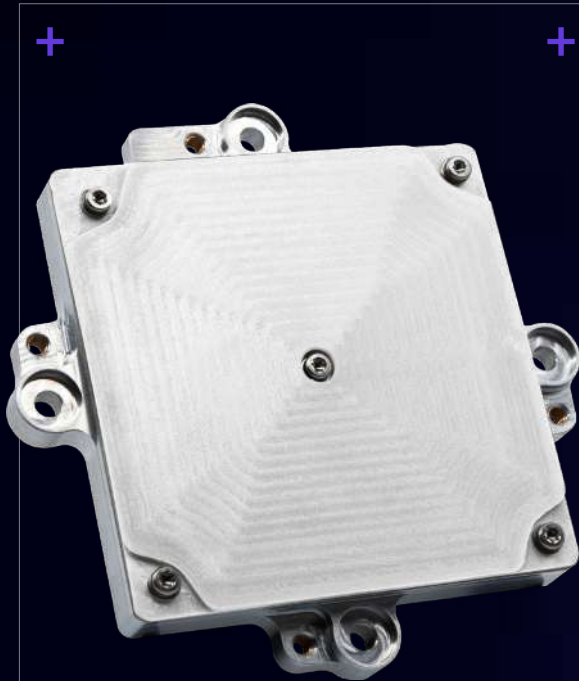

## NAVIGATION ANTENNAS

# GNSS L1/E1 Bands Antenna

Anywaves' GNSS L1/E1 Bands antenna is our latest navigation antenna designed for LEO platforms, ensuring precise positioning and timing in harsh space environments. Operating in the GPS L1 and Galileo E1 frequency bands, this antenna guarantees exceptional performance. It offers a superior gain ( $> 6$  dBi) and low reflection ( $< -18$  dB), and the Right Hand Circular polarization improves signal stability and reliability to avoid any blackouts risks.

This antenna is equipped with a robust PEEK radome for protection against extreme conditions. Its compact size, light weight and SMA connector facilitate easy integration with your platform without compromising on performance.

NB : compatible with Anywaves Test Hat for GNSS Antennas.

Rx

Hemispherical Coverage

HPBW  $> 90^\circ$

Size  $< 1U$

## Benefits

- ✓ High Performance on L1 Band (GPS) & E1 Band (Galileo)
- ✓ High cross-polarization discrimination
- ✓ Acceptance Tests (RF, Mechanical, Thermal) included:
  - Return loss
  - Z-axis random vibration
  - Thermal cycling
- ✓ Radome protection against harsh environment: temperature & ESD
- ✓ ITAR Free





# Typical Measured Performance

Rx

Hemispherical Coverage

HPBW &gt; 90°

Size &lt; 1U

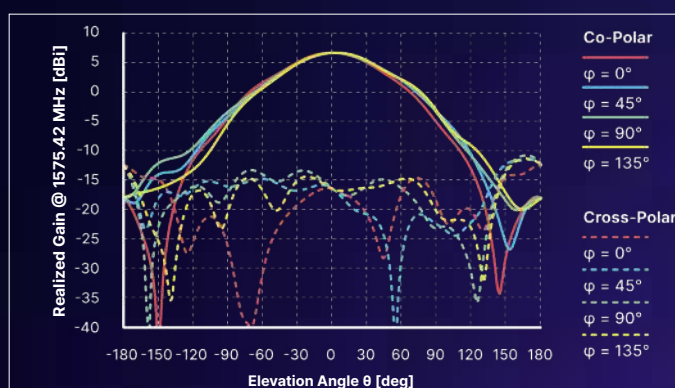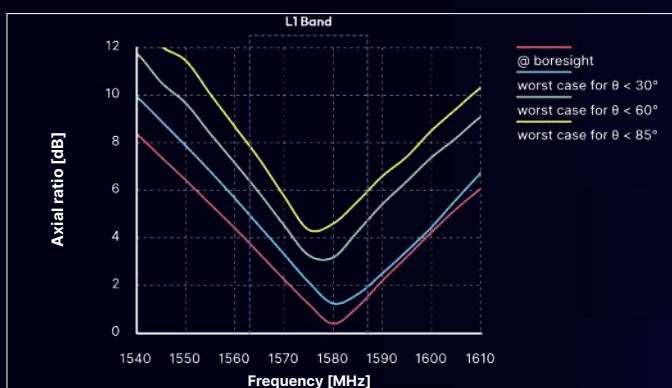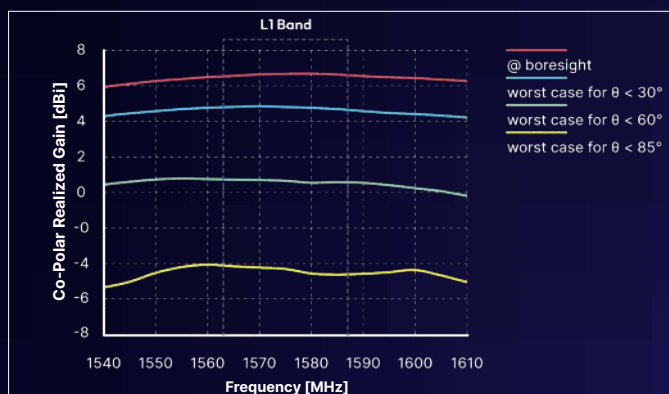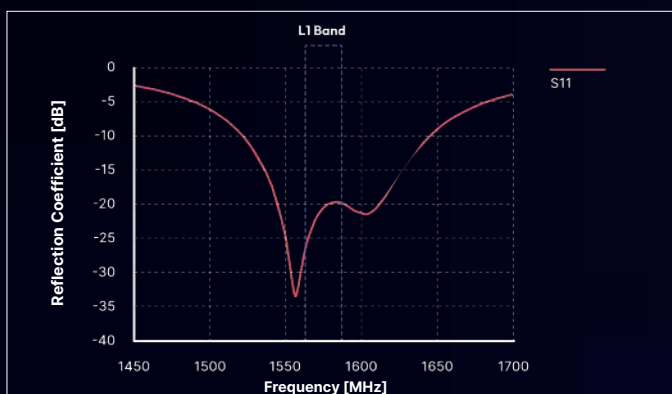

## ✓ Typical Measured Performances

|                                                                         |                                                                                    |
|-------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| Frequency Band                                                          | GPS L1: 1563 MHz to 1587 MHz                                                       |
| Polarization                                                            | Right Hand Circular Polarization                                                   |
| Reflection Coefficient                                                  | < -18 dB                                                                           |
| Realized Gain @ 1575.42 MHz                                             | > 6.5 dBi @ boresight<br>> 0.5 dBi @ $\pm 60^\circ$<br>> -4.5 dBi @ $\pm 85^\circ$ |
| Axial Ratio @ 1575.42 MHz                                               | < 1.5 dB @ boresight<br>< 3.5 dB @ $\pm 60^\circ$<br>< 4.5 dB @ $\pm 85^\circ$     |
| Phase Center Position (PCO) Variation<br>Maximum Variation vs Frequency | Variation within a sphere of radius < 1 mm                                         |
| Phase Center Variation (PCV)<br>Maximum Variation vs Elevation          | < 0.4 mm ( $\pm 60^\circ$ FoV)                                                     |
| Group Delay Variation                                                   | < 0.8 ns                                                                           |

## ✓ Physical Characteristics

|                                        |                                                                                                                            |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Envelope Size                          | L 96.6 x W 96.6 x H 23.26 mm <sup>3</sup><br>Protruding Height: < 8 mm                                                     |
| Test-Cap Compatibility                 | Yes                                                                                                                        |
| Mass                                   | 119 g                                                                                                                      |
| Connector                              | Coaxial SMA female (50Ω)                                                                                                   |
| Mechanical Interface                   | 4 x M3 (unthreaded hole)                                                                                                   |
| Qualification Temperature              | -120°C / +120°C                                                                                                            |
| Protective Radome                      | PEEK coated with SG121FD white paint (on Flight Models only) resistant to thermal and preventing electrostatic discharges. |
| Acceptance Tests on Flight Models      | - Radio Frequency<br>- Mechanical<br>- Thermal                                                                             |
| Acceptance Tests on Engineering Models | Radio Frequency Only                                                                                                       |



## NAVIGATION ANTENNAS

# GNSS All-Bands Antenna

Anywaves GNSS all-bands antenna is perfectly suited for LEO platforms. Operating in the frequency band from 1.16 GHz to 1.61 GHz, our antenna covers all GNSS constellations simultaneously with its very stable phase center and circular polarization. This offers excellent signal stability, ensuring no signal blackouts occur even if one GNSS constellation breaks down.

This antenna has a TRL 8 and has successfully passed qualification tests. Developed under the European Space Agency Navisp contract, this antenna is reliable and efficient, giving you the accuracy and precision you need to ensure your satellite is always in the right position.

**NB : compatible with Anywaves Test Hat for GNSS All-Bands Antenna.**

Rx

Hemispherical Coverage

Very High Accuracy

Size < 1U

## Benefits

- ✓ All GNSS bands : GPS, Galileo, Glonass, Beidou, IRNSS L5, QZSS L6, INMARSAT in L-band for precise point positioning (PPP).
- ✓ Unique GNSS All-Bands antenna on the market
- ✓ Acceptance Tests (RF, Mechanical, Thermal) included:
  - Return loss
  - Z-axis random vibration
  - Thermal cycling
- ✓ Radome protection against harsh environment: temperature & ESD
- ✓ ITAR Free





# Typical Measured Performance

Rx

Hemispherical Coverage

Very High Accuracy

Size &lt; 1U

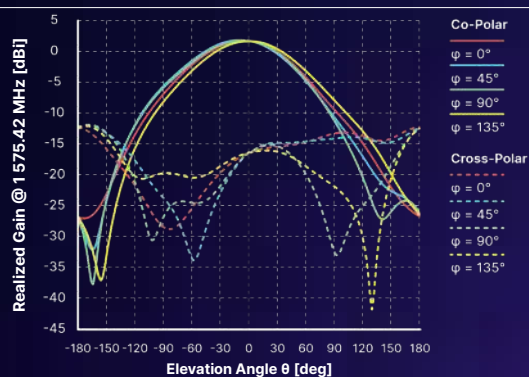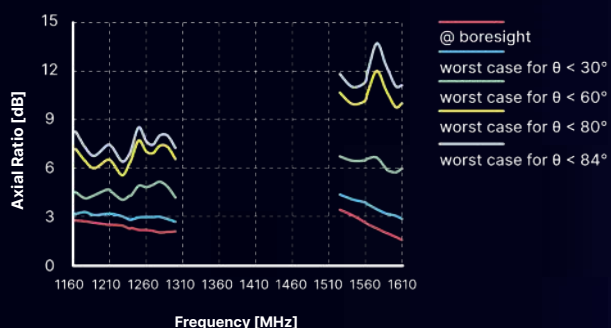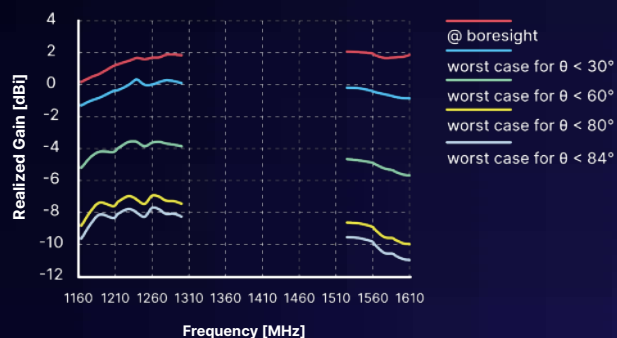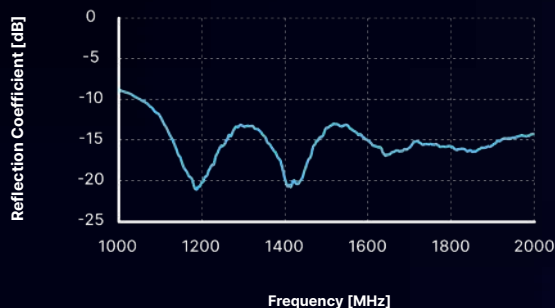

## ✓ Typical Performance

|                                                                            |                                                                                                                                                  |
|----------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Frequency Bands                                                            | 1 160 MHz to 1 610 MHz:<br>GPS L1/L2/L5, Galileo E1/E5a/E5b/E6<br>Glonass G1/G2/G3, Beidou B1/B2a/B2/B3<br>Inmarsat L-band:<br>1 525 – 1 559 MHz |
| Polarization                                                               | Right Hand Circular Polarization                                                                                                                 |
| Reflection Coefficient                                                     | ≤ -10 dB                                                                                                                                         |
| Realized Gain                                                              | @ boresight > 0 dBi                                                                                                                              |
| Gain Variation                                                             | In all individual sub-bands:<br>< 0.6 dBi                                                                                                        |
| Axial Ratio                                                                | @ boresight < 3 dB                                                                                                                               |
| Phase Center Offset<br>(± 30° FoV)<br>Maximum Variation vs<br>Frequency    | Variation within a sphere of radius<br>< 4.7 mm for all bands<br><br>Variation within a sphere of radius<br>< 1.8 mm for individual sub-bands    |
| Phase Center Variation<br>(± 30° FoV)<br>Maximum Variation vs<br>Elevation | Variation < 0.4 mm within ± 30°<br>Variation < 2.6 mm within ± 60°                                                                               |
| Group Delay Variation                                                      | < 1.2 ns                                                                                                                                         |

## ✓ Physical Characteristics


|                                           |                                                                                                                                                                     |
|-------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Envelope Size                             | 99.4 mm x 99.4 mm x 15.2 mm<br>Protruding height: 8.7 mm                                                                                                            |
| Mass With Connector                       | 130 g                                                                                                                                                               |
| Connector                                 | Coaxial SMA female 50 Ω                                                                                                                                             |
| Mechanical Interface                      | 4 x M3 (unthreaded hole)                                                                                                                                            |
| Qualification Temperature                 | -120°C / +120°C                                                                                                                                                     |
| Protective Radome                         | PEEK coated with SG- 121FD<br>white paint (on Flight Models only)<br>resistant to thermal and radiation<br>environments and preventing<br>electrostatic discharges. |
| Acceptance Tests on<br>Flight Models      | - Radio Frequency<br>- Mechanical<br>- Thermal                                                                                                                      |
| Acceptance Tests on<br>Engineering Models | Radio Frequency Only                                                                                                                                                |



- ✓ Integrated active electronic board with amplification and filtering
- ✓ Very stable phase center
- ✓ Thermal shield against harsh environment
- ✓ Acceptance tests included
- ✓ ITAR Free
- ✓ Test Hat compatible

|                 |                                                                                                                                                 |                  |                                     |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------|------------------|-------------------------------------|
| Frequency Bands | From 1.16 GHz to 1.61 GHz<br>GPS L1/L2/L5, Galileo E1/E5a/E5b/E6<br>Glonass G1/G2/G3, Beidou B1/B2a/B2/B3<br>Inmarsat L-band: 1.525 – 1.559 GHz | RF Interface     | SMA Female                          |
| Polarization    | Right Hand Circular Polarization                                                                                                                | DC Interface     | Micro-D 9 Socket Female             |
| Realized Gain   | > 0 dBi @ boresight<br>> -5 dBi @ $\pm 30^\circ$<br>> -11 dBi @ $\pm 60^\circ$                                                                  | DC Input Voltage | 5.5 - 6.5 V                         |
| TRL             | 5                                                                                                                                               | Consumption      | < 500 mW                            |
| Size            | 99.4×99.4×35 mm <sup>3</sup>                                                                                                                    | LNA Block Gain   | Typical: 22 dB<br>Worst Case: 20 dB |
| Return Loss     | < -15dB                                                                                                                                         | Noise Figure     | Typical: 1.5 dB                     |



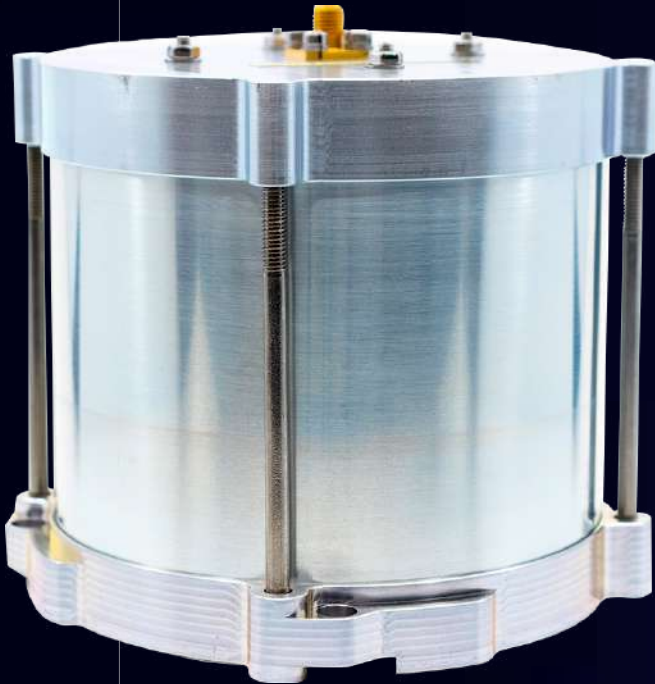

## NAVIGATION ANTENNAS

# Test Hat for GNSS All-Bands Antennas

Anywaves Test Hat for GNSS All-Bands Antennas is essential to carry out end to end testing (parallelism, assembly chain, thermal vacuum...). It features a simple and robust design consisting in a cylindrical aluminum cavity, covered with absorber material and terminated by a RF probe.

It operates over the frequency bands of the GNSS All-Bands antenna. It is delivered in a single part that can be directly screwed on top of the antenna, minimizing both the risk to damage the antenna and the manipulation steps.

**NB : a Test Hat compatible version of the Anywaves GNSS All-Bands antenna is required.**

RF Chain Measurement

TVAC Compatibility

Plug & Play

On-platform Test

## Benefits

- ✓ Enables reproducible measurements of antenna & transceiver on the platform
- ✓ Very low impact on the antenna matching (reflection coefficient)
- ✓ No mounting bracket required on the platform (screwed on the antenna itself)
- ✓ ITAR Free
- ✓ Compatible with thermal vacuum environment with low outgassing properties
- ✓ Safe & easy to mount & dismount thanks to an oriented slot ensuring the correct positioning
- ✓ Low RF leakage to protect users from radiation during the test



# Typical Measured Performance

RF Chain Measurement

TVAC Compatibility

Plug & Play

On-platform Test

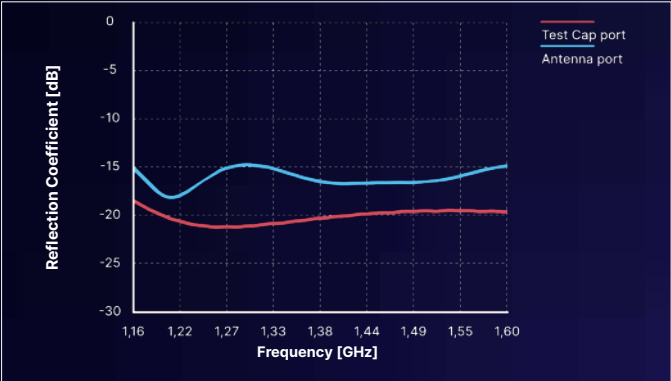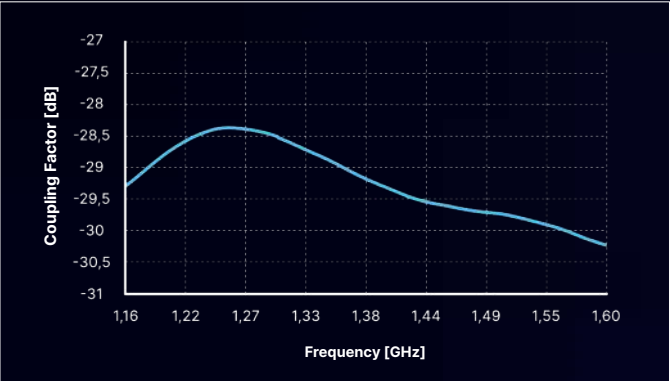


## Typical Performance

|                                         |                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Frequency Bands                         | From 1 160 MHz to 1 610 MHz                                                                                                                                                                                                                                                                                                                                          |
| Bandwidth                               | > 450 MHz                                                                                                                                                                                                                                                                                                                                                            |
| Polarization                            | Right Hand Circular Polarization                                                                                                                                                                                                                                                                                                                                     |
| Reflection Coefficient at Antenna Port  | < -10 dB                                                                                                                                                                                                                                                                                                                                                             |
| Reflection Coefficient at Test Hat Port | < -17 dB                                                                                                                                                                                                                                                                                                                                                             |
| Coupling Factor                         | ~ -29 dB                                                                                                                                                                                                                                                                                                                                                             |
| Coupling Factor Variation               | < 1 dB everywhere within the frequency bands: <ul style="list-style-type: none"><li>- GPS: L2/L5</li><li>- Galileo: E5a/E5b/E6</li><li>- Glonass: G2/G3</li><li>- Beidou: B2/B3</li></ul> < 0.5 dB everywhere within the frequency bands: <ul style="list-style-type: none"><li>- GPS: L1</li><li>- Galileo: E1</li><li>- Glonass: G1</li><li>- Beidou: B1</li></ul> |

## Physical Characteristics

|                                 |                             |
|---------------------------------|-----------------------------|
| Envelope Size Without Connector | Ø 118.8 mm x 96.3 mm        |
| Mass With Connector             | 915 ± 5 g                   |
| Connector                       | Coaxial SMA female (50 Ω)   |
| Mechanical Interface            | 4 x M3 mm (unthreaded hole) |
| Qualification Temperature       | -40°C / +70°C               |

# 04 Launcher Antennas



---


With the advent of reusable launchers, the design of antennas faces new challenges.




## Launcher Antennas



Anywaves provides reliable antennas specifically designed and manufactured for launchers. Our antennas are constructed with durable materials, featuring a thermal shield for resilience in harsh launch conditions. This design ensures accurate and precise communication between the launcher and ground during the mission.

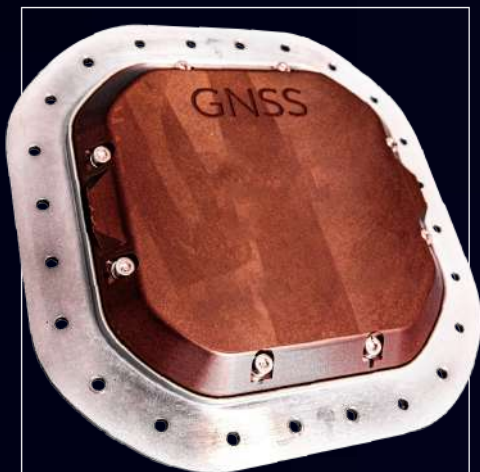

**GNSS All-Bands  
Launcher Antenna**

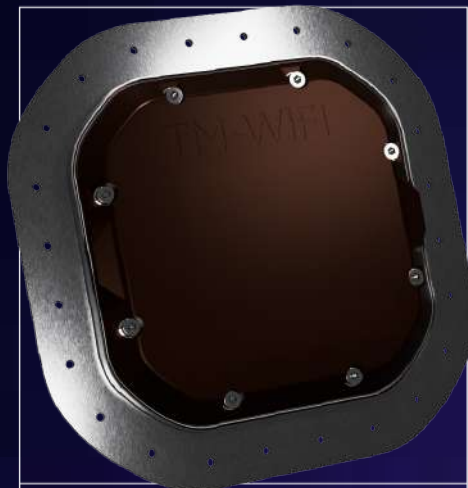

**S-Band  
Launcher Antenna**



- ✓ Unique GNSS All-Bands Antenna for launcher platform
- ✓ Very stable phase center
- ✓ Thermal shield against harsh environment
- ✓ Acceptance tests included
- ✓ ITAR Free
- ✓ Test Hat compatible

- ✓ Unique S-Band Antenna for launcher platform
- ✓ Full Duplex Telemetry & Telecommand
- ✓ Thermal shield against harsh environment
- ✓ Acceptance tests included
- ✓ ITAR Free
- ✓ Test Hat compatible

| Frequency Bands | From 1.16 GHz to 1.61 GHz<br>GPS L1/L2/L5, Galileo E1/E5a/E5b/E6<br>Glonass G1/G2/G3, Beidou B1/B2a/B2/B3<br>Inmarsat L-band: 1.525 – 1.559 GHz |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Polarization    | Right Hand Circular Polarization                                                                                                                |
| Realized Gain   | > 0 dBi @ boresight<br>> -2 dBi @ $\pm 30^\circ$<br>> -6 dBi @ $\pm 60^\circ$                                                                   |
| TRL             | 8                                                                                                                                               |
| Size            | 150×150×30 mm <sup>3</sup>                                                                                                                      |
| Materials       | Antenna protected with high-quality thermal shield                                                                                              |

| Frequency Bands | From 2.025 GHz to 2.29 GHz                                                         |
|-----------------|------------------------------------------------------------------------------------|
| Polarization    | Left or Right Hand Circular Polarization                                           |
| Realized Gain   | > 6.0 dBi @ boresight<br>> 2.0 dBi @ $\pm 30^\circ$<br>> -4.0 dBi @ $\pm 60^\circ$ |
| TRL             | 8                                                                                  |
| Size            | 145×145×30 mm <sup>3</sup>                                                         |
| Materials       | Antenna protected with high-quality thermal shield                                 |



05

# Payload Antennas

---



Designed to serve mission payloads, these antennas enable signal transmission, reception, and measurement across a wide range of frequencies, coverage patterns, and polarizations—supporting applications such as scientific instruments, radar, spectrum monitoring, and communications.







# Payload Antennas

## High-Gain Antennas

High-gain antennas allow for more power to be transmitted to the receiver for high precision targeting of radio signals. These properties are crucial when it comes to X-, Ku- and Ka-band applications to cope with strong atmospheric attenuation.

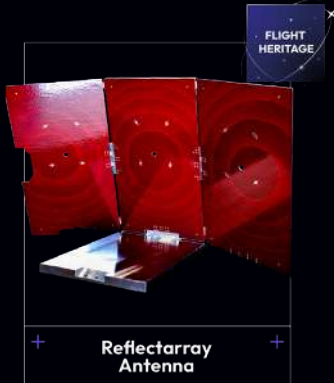


Reflectarray Antenna



Slotted Waveguide Array Antenna

EXPLORE



## Spectrum Monitoring Antennas

These antennas are engineered for payloads requiring wideband signal detection and analysis. Covering broad frequency ranges with tailored radiation patterns, they support missions involving spectrum intelligence.




Compact Wideband Antenna



Quad Ridged Horn Antenna

EXPLORE



## LEO-PNT Antennas

Paired with GNSS All-Bands Antennas for reception, these payload antennas are designed to re-radiate GNSS signals from LEO, contributing to next-generation multi-layer PNT architectures. They enhance service robustness, improve signal availability and accuracy, and enable innovative PNT applications beyond traditional GNSS performance.




Quadrifilar Helix Antenna



GNSS All-Bands Antenna

EXPLORE



# Didn't find what you were looking for?

If you need a higher gain or a specific solution, let's review your specifications! Anywaves can assist you in designing the ideal antenna, including customizable array solutions tailored to your projects. We guide you from system requirements to antenna features for optimal performance - reach out to discuss your needs!

# They fly with us!



# ANYWAVES

SPACE ANTENNA MAKERS

DOWNLOAD THE  
PDF VERSION ↗



CONTACT US NOW! ↗



## ANYWAVES

2, Esplanade Compans Caffarelli  
Bât Toulouse 2000 - HALL D  
31000 Toulouse, FRANCE

## Sales Contacts

**François Morizur**  
Chief Commercial Officer  
f.morizur@anywaves.com  
+ 33 (0)7 67 49 79 21

**Anne-Lise Vo Thanh**  
Sales Manager  
alvt@anywaves.com  
+ 33 (0)7 67 82 01 37

in



anywaves.com